

BOTTOM STREET DRAIN D 110/125 – STANDARD

The product is designed for draining storm water (surface) water to exterior sewage lines, allowing for rain pipe installations. It includes a dry anti-odour flap, which blocks the odour spreading from the sewage pipeline. The eccentric cover in the STANDARD model allows for cut-outs as needed, with diameters 75, 80, 90, 100, 110 or 125 mm. Made of UV-stabilized polypropylene. Loading capacity K3 – 300 kg, resistance to 90 °C, standard EN 1253 – 1.

Part No.	Name	Packaging/Pallet [pcs]	Flow rate [l / min]	Weight [kg / pcs]	Colour
325 S	KV 110/125 ST	4 / 96	390/530	1,13	■
325 S s	KV 110/125 ST-s	4 / 96	390/530	1,13	■




gray

BOTTOM STREET DRAIN D 110/125 – UNIVERSAL

The product is designed for draining storm water (surface) water to exterior sewage lines, allowing for rain pipe installations. It includes a dry anti-odour flap, which blocks the odour spreading from the sewage pipeline. The set is supplied including reduction rings 75/80, 90, 100, 110, 125 and inlet grid. Made of UV-stabilized polypropylene. Loading capacity K3 – 300 kg, resistance to 90 °C, standard EN 1253–1.

Part No.	Name	Packaging/Pallet [pcs]	Flow rate [l / min]	Weight [kg / pcs]	Colour
325 C	KV 110/125	4 / 96	390/530	1,25	■
325 C s	KV 110/125-s	4 / 96	390/530	1,25	■

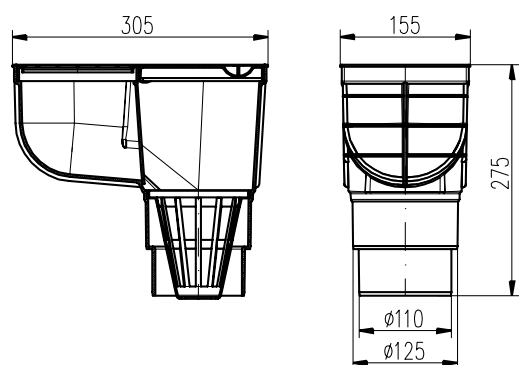

gray