


## BOTTOM FLOOR DRAIN DN 110 – PLASTIC/STAINLESS STEEL

Floor drain with water filled anti-odour protection, for interior installations. Made in three options, with a plastic grid and with all-stainless steel surface. Made of polypropylene and stainless steel DIN 1.4301. Loading capacity K3 – 300 kg, resistance to 90 °C, standard EN 1253 – 1.

Part No.	Name	Packaging/Pallet [pcs]	Flow rate [l / min]	Weight [kg / pcs]	Colour
323 P	DNS 110 P	9 / 432	55	0,29	■
323 P-b	DNS 110 P-b	9 / 432	55	0,29	□
323 N	DNS 110 N	9 / 432	50	0,43	■



stainless steel grid 1.5 mm

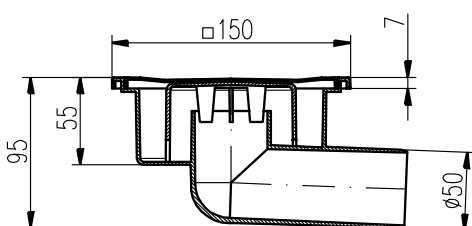

## SIDE FLOOR DRAIN DN 50/95 – PLASTIC/STAINLESS STEEL

Floor drain with water filled anti-odour protection, for interior installations. Made in two options, with a plastic grid and with all-stainless steel surface. Made of polypropylene and stainless steel DIN 1.4301. Loading capacity K3 – 300 kg, resistance to 90 °C, standard EN 1253 – 1.

Part No.	Name	Packaging/Pallet [pcs]	Flow rate [l / min]	Weight [kg / pcs]
326 P	DN 50/95 P	12 / 576	55	0,26
326 N	DN 50/95 N	12 / 576	50	0,44



stainless steel grid 1.5 mm